



SIGNATURE

SPORTS FLOORING



SPECIALISTS IN SPORTS FLOORING

- Pad and Pour Flooring
- Rolled Vinyl Flooring
- Wet Area Flooring
- Rubber Flooring
- Modular Flooring

TOLL FREE **800 705 1544**
DIRECT **212 953 1116**
FAX **212 953 1117**

www.signaturesportsflooring.com

CONTENTS

- Application Guide 2
- About Us 3
- SignaFlor 4
 - Pad and Pour Flooring
- SignaFlex 6
 - Rolled Vinyl Flooring
- SignaFlex Aqua 8
 - Wet Area Flooring
- RubberDeck 10
 - Rubber Flooring
- TempoTile 12
 - Modular Flooring
- SignaDeck 14
 - Premier Rubber Flooring



SIGNAFLOR
 SIGNAFLEX
 SIGNAFLEX AQUA
 SIGNAFLEX AQUA LR
 RUBBERDECK
 TEMPOTILE Smooth
 TEMPOTILE Vinyl
 TEMPOTILE Deluxe
 SIGNAFLOR Tennis
 SIGNAFLOR 3mm
 SIGNAFLOR 9.5mm

Area:										
Gymnasium										
Game Courts										
Aerobic Room										
Multipurpose										
Sauna / Steam Room										
Locker Room - Dry										
Pool										
Shower Area										
Changing Room										
Weight Room										
Common Area										
Location:										
Outdoor										
Indoor										
Activity:										
Basketball										
Tennis										
Volleyball										
Cardio										
Running										
Walking / Jogging										
Yoga / Pilates										

■ Ideally Suited
■ Suitable



Signature Sports Flooring specializes in manufacturing, distributing, and installing floors for all your sports flooring applications, including weight rooms, locker rooms, aerobic rooms, gymnasiums, common areas, and multi-purpose facilities. What distinguishes us is our extensive product line, nationwide capabilities and the commitment we demonstrate to our clients. Our wide selection of synthetic sports surfaces is made to maximize athletic performance and to meet industry standards while using recycled and recyclable materials wherever possible. We are able to conduct on-site surveys and moisture tests, if required, to determine the best suited floor for your facility and to guarantee the durability and longevity of your floor for years to come. Most importantly, our expert team of sports flooring specialists will install your floor with all the care and attention you and your facility deserve. You, the customer, are our top priority and with our wide selection of products and services, Signature Sports Flooring is your one source for all your sports surfacing needs.



SIGNAFLOOR™ Pad and Pour Flooring

- A poured-in-place system that creates a synthetic, seamless surface for all multi-purpose rooms, including gym floors, weight rooms, indoor running tracks, locker rooms and aerobic rooms.
- A cost effective flooring alternative to real wood without compromising quality or durability.
- Evenly poured wear layer, offering consistent ball bounce, shock absorption, coefficient of friction, and ease of maintenance to other comparable products.
- The SignaFlor system is installed by our experienced team
- Vibrant color options allow for customization to match your corporate/school colors.

SignaFlor™ is the most cost effective alternative to hardwood gym floors without compromising quality or durability. The SignaFlor Pad and Pour system offers many benefits over traditional hardwood gym floors:

- Available in 12 standard surface colors, 7 line colors, and custom options that allow you to match your school or corporate colors. Maximize team spirit with a professional graphic display of your logo and color scheme.
- This is the last gym floor you will ever need to buy. Unlike wood, the SignaFlor renewable wear surface is easily refurbished to last the life of your facility. You can easily repair damaged areas or change the colors or graphics if necessary.
- SignaFlor allows you to use your facility for non-sporting events like dances, parties, and rallies, as it has the resiliency to stand up to many different demands including chairs, tables, non-athletic footwear, and bleachers.
- SignaFlor meets LEED certification requirements for use of recycled products. The shock absorbing rubber mat layer is made from 100% recycled tires. Instead of chopping down precious trees, your gym floor can help the environment by reducing landfill waste.
- SignaFlor utilizes a seamless polyurethane structural layer that is strong, durable and free of mercury, lead and other heavy metals.
- Shock absorption can be altered during the installation process to meet your specific needs. SignaFlor provides a consistent system thickness for controlled performance, excellent force reduction, and comes in different thicknesses and density for different applications.
- SignaFlor meets any application need for every age group, activity, and budget.

5th Layer > TOP COAT

Pigmented UV and abrasion-resistant polyurethane

4th Layer > WEAR LAYER

Self-leveling seamless polyurethane

3rd Layer > SEALER


Thixotropic polyurethane compound

2nd Layer > UNDERLAYMENT

Pressed recycled rubber granules

1st Layer > ADHESIVE

Two component polyurethane

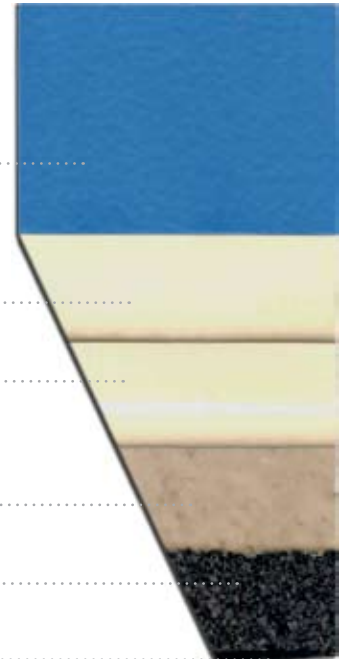



Seamless pad and pour system

Available in several thicknesses: 4mm, 6mm, 7mm, 9mm, 14mm (optional)

Optimum coefficient of friction and shock absorption

Renewable wear layer and color stability

Resilient to heavy usage: chairs, tables and bleachers

Meets LEED Certification


Fully customizable colors and thicknesses

Ideal for gyms and game courts, indoor tracks

1-year warranty



COLORS

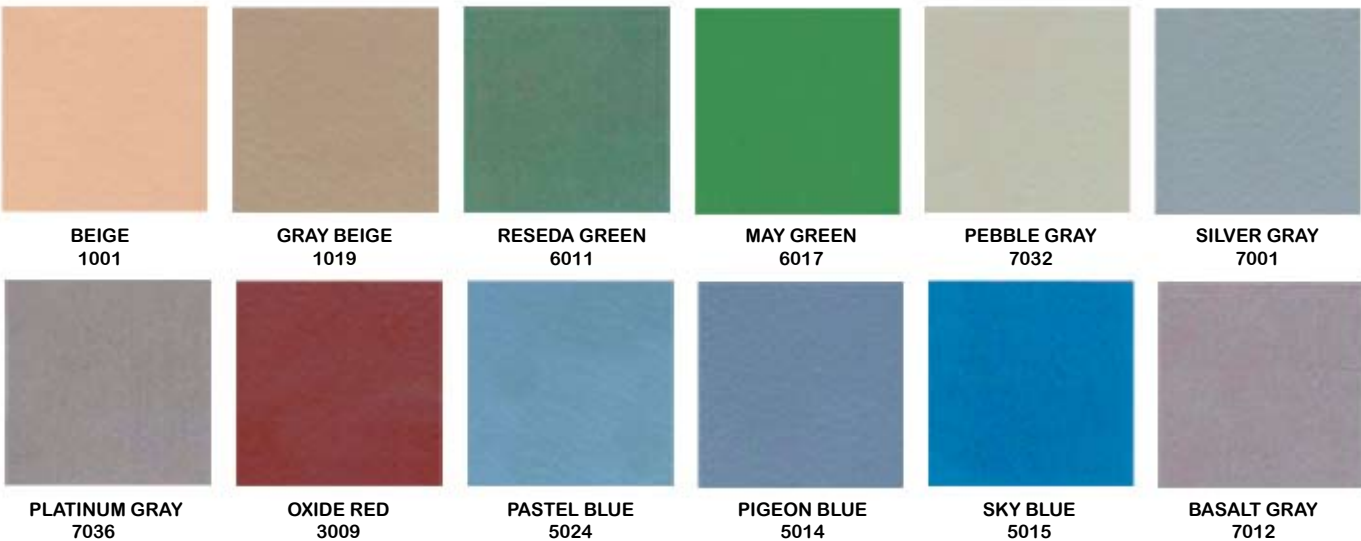

LINE COLORS



TECHNICAL SPECIFICATIONS



Total Thicknesses	6mm, 8mm, 9mm, 11mm (optional 15mm, 17mm)
Shore A hardness	80
Tensile strength DIN 53504	N/mm 2 7.0
Elongation at break DIN 53504	150%
Shock absorption	min. 51 (Cat. 1) min. 45 (Cat. 2): 4mm = 14% , 7mm = 28%, 9mm = 32%
Rolling load	1000 N
Remaining indentation max. 0.5mm	4mm = 0.21, 7mm = 0.17, 9mm = 0.37
Ball rebound min. 90%	99.0% (4,7, and 9)
Sliding coefficient 0.4 - 0.6mm	4mm = 0.43, 7mm=0.50, 9mm = 0.44

SIGNAFLEX™ Rolled Vinyl Flooring

- Unique alternative to existing wood flooring products. More cost effective without compromising a consistent ball bounce, shock absorption, and coefficient of friction throughout the floor.
- Perfect for any application including multi-purpose facilities, gym floors, aerobic rooms, cardiovascular rooms, and locker rooms.
- Numerous color options and thicknesses available to meet any customer need.
- SignaFlex can be installed in less time than most sports surfaces, maintenance is simple, allowing you to keep the floor looking new for many years.

SignaFlex™ is an attractive rolled vinyl flooring product that is easy to install and maintain. If you are looking for a real wood appearance without the expense, this is the best option available for you. Suitable for gymnasiums, locker rooms, yoga or aerobics studios, equipment rooms, common areas, and more, SignaFlex offers many options and benefits:

- Available in 8 smooth faux wood finishes, 10 lightly textured solid colors, and a texture designed specifically for badminton courts. (Some colors require a longer lead time for manufacturing.)
- Superior shock absorption makes it a safe flooring solution for any activity or age group.
- Great coefficient of friction offers optimal slip resistance
- Consistent vertical deformation enables participants to increase their on-court stability while eliminating area indentation.
- Consistent ball rebound superior to that of other comparable floors.
- Sustains its structure under rolling loads and maintains a long-term deformation resistance to static load.
- Depending on your sports flooring requirements, SignaFlex comes in three different size rolls:
 - 4.5mm x 5'11" x 65'6"
 - 6.5mm x 5'11" x 49'
 - 8.0mm x 5'11" x 36'
- SignaFlex is comprised of four layers engineered to maximize your sports flooring's athletic potential. The multi-layered construction creates a subtle spring-like effect that allows for maximum player performance with less fatigue. An anti-bacterial layer suppresses growth of bacteria on the floor and helps to keep your gym more sanitary.
- Multi-layered construction provides excellent sound absorption - especially compared to traditional hardwood floors. With SignaFlex, you will have a quieter gym with softer acoustics.

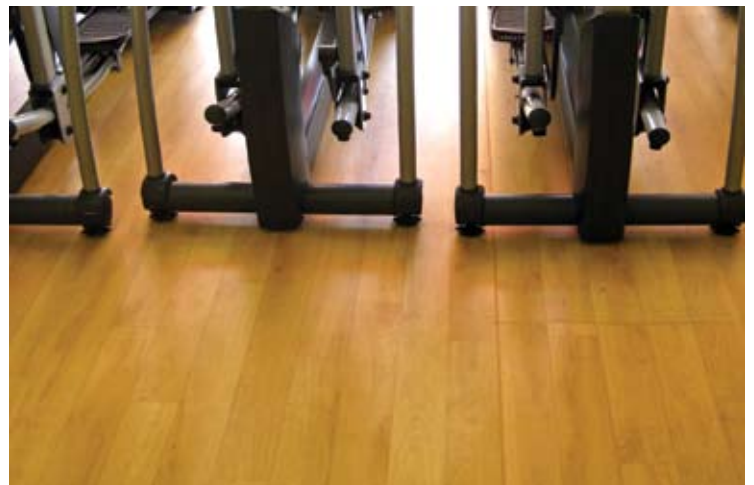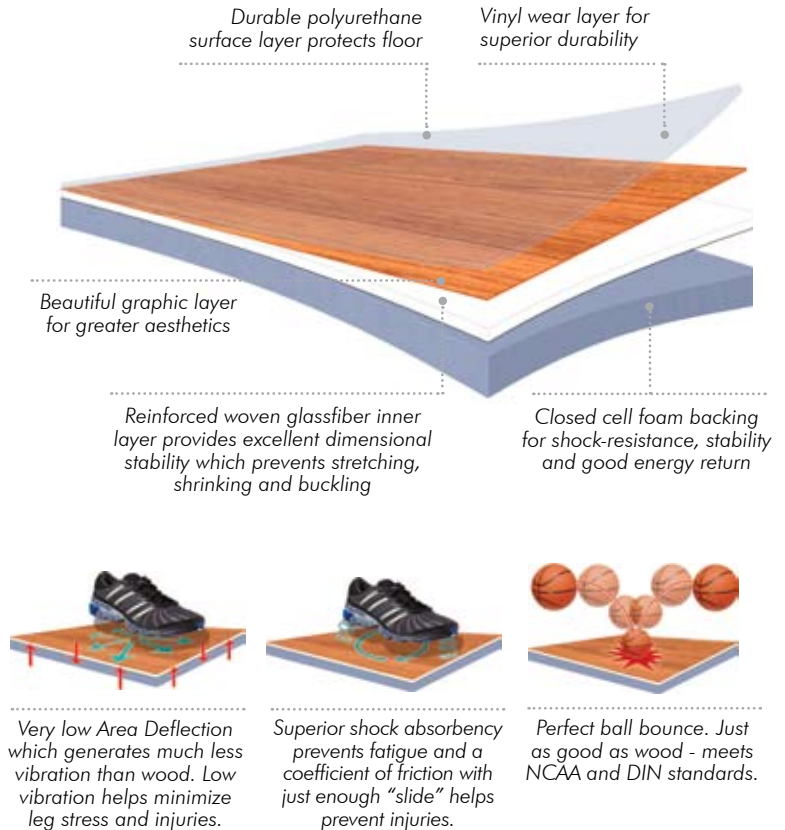



Rolled vinyl with a real wood appearance
 Polyurethane coating resists dirt build-up.
 Superior durability, stability, shock absorption and slip resistance
 Contains anti-bacterial properties
 Consistent vertical deformation and ball rebound
 Rolls are 5'11" wide, choose from 3 thicknesses:
 • 4.5 mm (65'6" long)
 • 6.5 mm (49'2" long)
 • 8.0 mm (36' long)
 10-year manufacturer warranty



COLORS



TECHNICAL SPECIFICATIONS

	Testing Procedure	Requirements	Badminton 3.9mm	SignaFlex 4.5mm	SignaFlex 6.5mm	SignaFlex 8mm
Roll Width			5'11"	5'11"	5'11"	5'11"
Roll Length			52'6"	65'5"	49'2"	36'
Weight			2.5 kg/m ²	3.1 kg/m ²	4.2 kg/m ²	5.2 kg/m ²
Shock Absorption	DIN V18 032-2	min. 25%	>25%	>25%	>25%	>25%
Sliding Properties	DIN V18 032-2	min.4; max.6	.58-.60	.40-.60	.40-.44	.57-.59
Vertical Deformation	DIN V18 032-2	max. 3.0mm	.7mm	1.4mm	.9mm	1.9mm
Area Deflection	DIN V18 032-2	max. 0%	0%	0%	0%	0%
Ball Rebound	DIN V18 032-2	min. 90%	99%	99%	99%	98%
Behavior Under Rolling Load	DIN V18 032-2	1000N	1000N	1000N	1000N	1000N
Impact Resistance	DIN V18 032-2	min. 8Nm	8Nm	12Nm	12Nm	11Nm
Residual Impression	DIN V18 032-2	max. .5mm	.13mm	.19mm	.17mm	.22mm
Chemical Resistance	KS M 3802-99		Excellent	Excellent	Excellent	Excellent
Loss on Heating	KS M 3802-99	<2.5%	1%	1%	0.90%	0.90%
Dimensional Stability by Heating	KS M 3802-99	<.5%(W); <.5%(L)	.03%(W); .04%(L)	.01%(W); .03%(L)	.03%(W); .04%(L)	.02%(W); .05%(L)
Evaluation of Microbial Action	ASTM G21-96		Class 0	Class 0	Class 0	Class 0
Bacterial Reduction Rate	FC-TM-20-01		99.80%	99.80%	99.80%	99.80%
Sound Isolation			20 dB	24 dB	25 dB	28 dB

SIGNAFLEX™ AQUA Wet Area Flooring

- Complete flooring solutions for showers and bare foot wet areas where cleanability, hygiene, water-proof sealing and safety are important.
- Perfect for use in showers, locker rooms, pool areas and changing rooms.
- Formulated with an integral bacteriostat to inhibit bacterial and fungal growth.
- Contains at least 10% post-consumer lead free recycled content.

SignaFlex™ Aqua and SignaFlex™ Aqua LR are our wet area flooring products perfect for locker rooms and pool areas where cleanliness, hygiene, waterproofing, and safety are important.

- SignaFlex Aqua is a textured rolled vinyl flooring product perfect for barefoot traffic areas such as poolside, steam rooms, whirlpool areas, and shower areas.
- SignaFlex Aqua LR is a smooth, yet slip-resistant waterproof floor ideal for soft-soled, high traffic areas like the locker room, corridors, common areas, and more.

The only difference between the two SignaFlex Aqua products is the surface texture. SignaFlex Aqua and Aqua LR's practical and hygienic features make them popular choices for schools, healthcare, and daycare facilities in addition to fitness and recreational centers:


- SignaFlex Aqua incorporates significant traction, built-in technology for ease of cleaning, stain resistance, and a bacteriostat which inhibits the growth of microorganisms and bacteria.
- SignaFlex Aqua contains at least 10% post consumer, lead-free recycled content, which may help facilities achieve LEED certification.
- SignaFlex Aqua and Aqua LR are each available in 9 colors (4 matching color sets and 5 additional contrasting colors).
- Rolls come in 6'7" x 66' with a 2mm thickness and are heat welded on-site to create watertight seams.
- SignaFlex Aqua is made of a high-quality vinyl and contains aluminum oxide throughout the thickness and silicon carbide and colored quartz in the surface layer. The backing is made of non-woven polyester/cellulose with glass fiber reinforcement. SignaFlex Aqua has a chemical resistance making it unaffected by surface water and many chemicals. It meets all the requirements for slip resistance, indentation resistance, fire safety, wear resistance, heat resistance and flexibility.

SignaFlex Aqua is installed by our team of experienced sports floor technicians. Your sub-surface is prepared and installation - including hot seaming - is performed quickly and professionally.



SHOWERS POOLS BAREFOOT AREAS

SignaFlex Aqua has a pronounced textured surface for superior slip resistance. Ideal for wet areas.

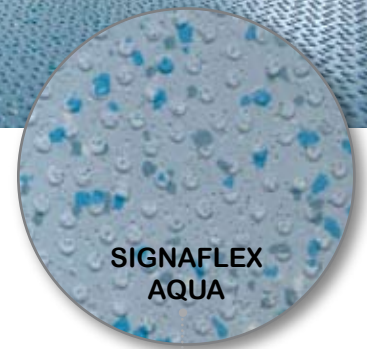


**SIGNAFLEX
AQUA**




HIGH-TRAFFIC AREAS COMMON AREAS LOCKER ROOMS

SignaFlex Aqua LR has a gently textured surface for areas that require slip resistance. Ideal for soft-sole areas.

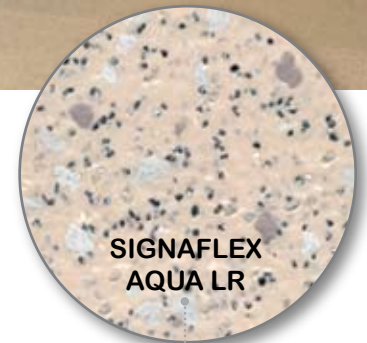

**SIGNAFLEX
AQUA LR**

COLORS

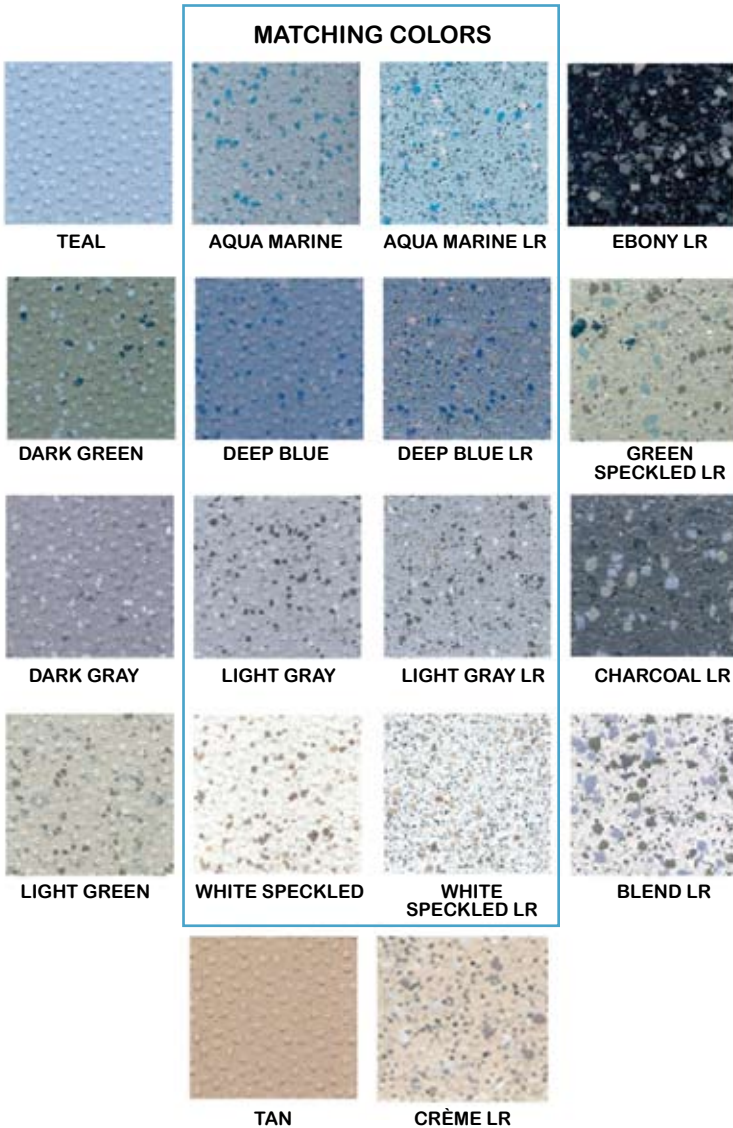

Wet area flooring for locker rooms and pool areas

Comes in 2 different textures and 9 colors:

- SignaFlex Aqua for barefoot areas (with nubs)
- Signa Flex Aqua LR for soft sole areas

Rolls are 6'7" x 66' x 2mm

Made of high quality vinyl and contains aluminum oxide, silicon carbide and colored quartz

Ideal where cleanability, hygiene, waterproof sealing and safety are important

Contains a bacteriostat which inhibits the growth of microorganisms and bacteria

Meets requirements for slip resistance, indentation resistance, fire safety, wear resistance, heat resistance and flexibility

Contains at least 10% post consumer lead-free recycled content. Meets LEED Certification.

7-year warranty



*EQ Credit 4.1 - Low VOC
Emitting Adhesives
Does not contain DEHP
Does not contain phthalates*

TECHNICAL SPECIFICATIONS


Thickness	.08"	2mm
Roll Length	66'	20m
Width	6'7"	2m
Weight High Quality Vinyl	4.8lbs/yd ² Surface Layer: Aluminum Oxide, Silicon Carbide and Colored Quartz	2.6kg/m ² Backing: Non-Woven polyester/cellulose, glass fiber reinforcement
Slip Resistance	Meets the current slip resistance Static Coefficient Friction Guidelines of the Americans with Disabilities Act and the Occupational Safety and Health Administration	ASTM D 2047 James Slip Test
Indentation Resistance	PASSED	ASTM F 970
Fire Safety	Tested in accordance with U.S. standards	Class 1 ASTM E 648 ASTM E 662<450
Wear Resistance	PASSED	ASTM C 501
Heat Resistance	Between -4 degrees F (-20 degrees C) and 140 degrees F (60 degrees C)	
Flexibility	PASSED	ASTM F 1303

RUBBERDECK™ Rubber Flooring

- Ideal for weight rooms, indoor jogging tracks, tennis courts, aerobic centers, ice rink perimeters, common areas and gymnasiums.
- Our most durable, heavy-duty and dent-resistant rubber flooring. Can withstand repeated battering by weights.
- Made from high-quality, recycled rubber.
- Available in 4 varieties: Rolls, Tiles, SuperTiles, and Elite Rolls
- Simple installation and maintenance.

RubberDeck™ is our most durable sports flooring product that can withstand repeated battering by dropped weights. This super shock absorbent, Earth-friendly flooring is available in 4 varieties and made from the highest quality recycled rubber, with colorful EPDM flecks. RubberDeck dent-resistant flooring is perfect for any weight room or equipment room, and is also a great choice for children's play areas, common areas, and much more. RubberDeck Elite is ideal for gym floors.


- RubberDeck provides superior sound and shock absorption, slip resistance, and an attractive seamless appearance.
- RubberDeck qualifies for LEED credits and is made from recycled goods.
- RubberDeck is easy to install, clean, and maintain, incurs very low life cycle costs, and most importantly is made in the USA.
- Unlike other athletic flooring options, custom logos and graphics are built into the floor surface for more durability and longer wear.

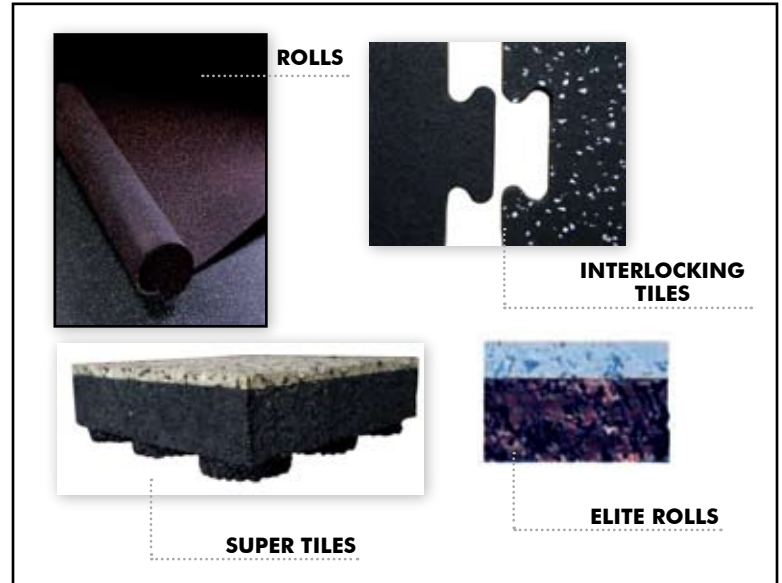

RubberDeck is available in 4 varieties:

- Rolls: 3 sizes – 6mm, 8mm, 9.5mm x 48" x 50'
- Interlocking Tiles: 8mm x 2' x 2'
- Super Tiles (2 layer): 1" x 2' x 2'
Designed with a super wear layer to provide unlimited design options and a greater shock absorption feature. Each tile contains a pedestal underside to run cables underneath. No adhesive is required, making installation quick and easy. Transition edging is available.
- Elite Rolls (2 layer): 8mm, 10mm, and 12mm x 48"
RubberDeck Elite delivers energy and exuberance to any fitness application. It is manufactured by laminating 4mm of brilliantly colored recycled rubber to a rubber underlayment ranging from 4mm - 8mm depending on your application, for a total thickness of 8mm, 10mm, or 12mm. RubberDeck Elite offers excellent force reduction and ball rebound making it suitable for indoor jogging tracks, tennis courts, gymnasium surfaces and aerobic centers. The 12mm option is spike resistant and suitable for competitive tracks and ice rink perimeters. Saturated color allows for variations in lane colors and reduces wear visibility.

COLORS - Rolls & Tiles

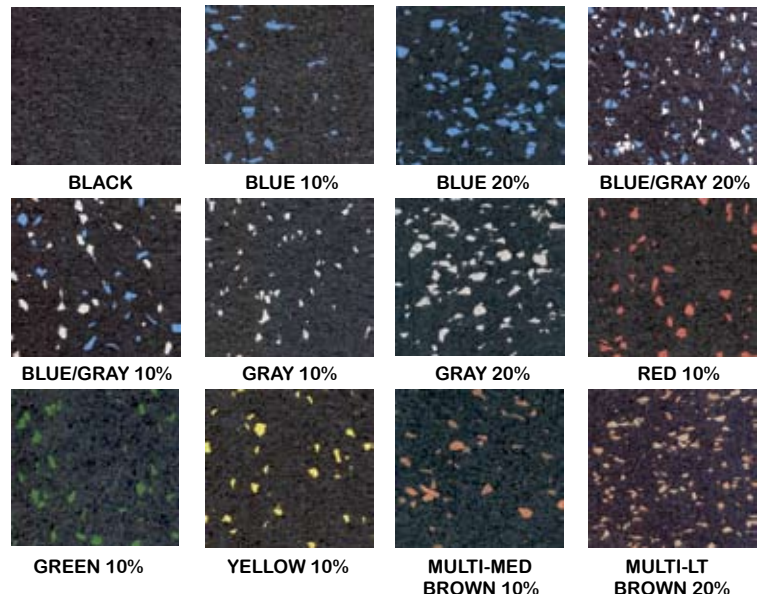



Weight rooms, gyms, common areas, aerobic rooms, ice rink perimeters, indoor jogging tracks, and tennis courts

Made from the highest quality recycled rubber and colorful EPDM flecks

Excellent shock absorption, slip resistance, force reduction, ball rebound, durability and simple installation and maintenance

Available in rolls and tiles


Custom colors and logo inlays available

Qualifies for LEED Certification and made in the USA


3-year warranty



COLORS - Super Tiles

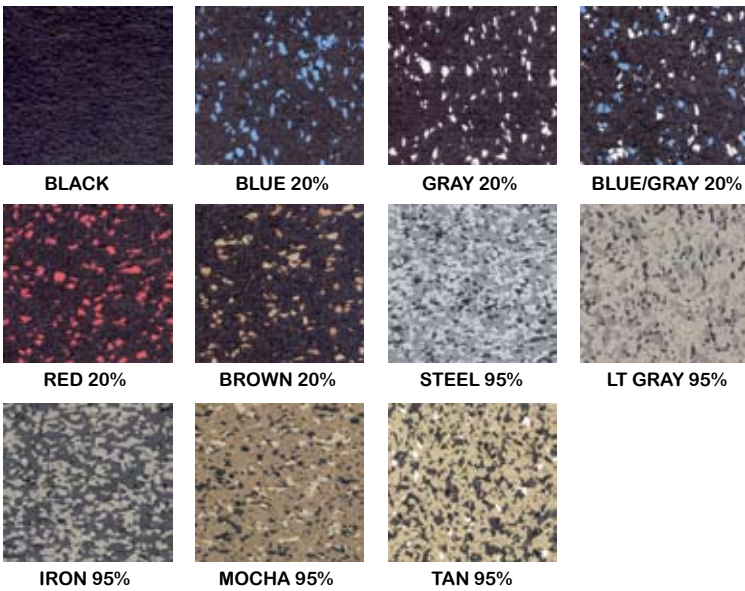

COLORS - Elite Rolls

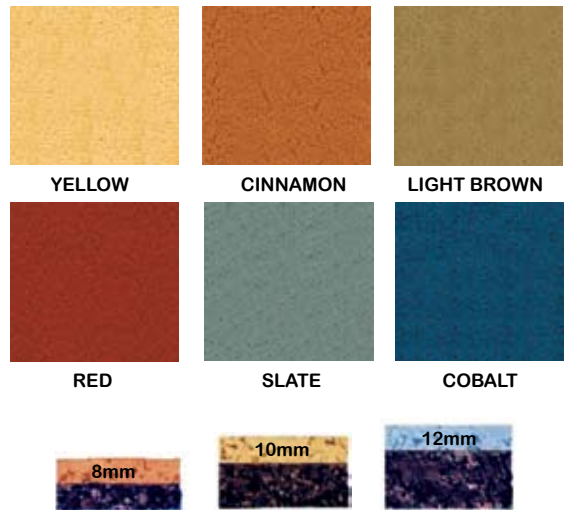

Ask about our custom color options: white, light gray, steel, dark gray, sandstone, adobe, aqua, sky blue, navy blue, lavender, purple, dark purple, emerald green, dark green, gold, brick red, dark pink, orange, pink, ocean, brown, black, and dark brown.

TECHNICAL SPECIFICATIONS

RubberDeck Rolls 48" width - 3 thicknesses	Thickness 0.236" (6mm) / 0.315" (8mm) / .374" (9.5mm)	Weight 1.25 lbs/sq ft / 1.72 lbs/sq ft / 1.92 lbs/sq ft
RubberDeck Tiles 24" x 24" x 8mm / 9.5mm (4 sq ft coverage)	0.354" (8mm) / 0.374" (9.5mm)	7 lbs per tile / 10.75 lbs per tile
RubberDeck Super Tiles 24" x 24" x 1" (4 sq ft coverage)	1" (25mm)	16 lbs per tile
RubberDeck Elite 48" roll width - 3 thicknesses	0.315" (8mm) / 0.328" (10mm) / 0.394" (12mm)	1.72 lbs/sq ft / 2.02 lbs/sq ft / 2.36 lbs/sq ft

Physical Data	ASTM	Rolls and Tiles	SuperTile	Elite Rolls
Tensile Strength	D412	200 lb/in ² min	200 lb/in ² min	200 lb/in ² min
Flexibility	F137	Pass 1/4" mandrel	N/A	Pass 1/4" mandrel
Coefficient of Friction	D2047	>0.9	>0.9	>0.9
Thermal Conductivity	C518	0.406 Btwu-in/hr-ft ² -°F	.400 btu-in/hr-ft ² -°F	>.400 btu-in/hr-ft ² -°F
Static Load Limit	F970, 1000 lbs	<0.020 in	Not determined	<0.020 in
Chemical Resistance	F925	No change	No change	Good
Impact Insulation Class	E49	45 min	>50	NA
Noise Reduction Coefficient	C423	0.10 sabine/ft ²	0.10 sabine/ft ²	NA
Elongation at Break	D412	75% min	75%min	NA
Standard Vertical Deformation	DIN 18032-2	-	-	.7mm / 1.0mm / .7mm
Deformation Trough W100	DIN 18032-2	-	-	0.00mm
Rolling Load Limit	DIN 18032-2	-	-	1000N
Ball Rebound	DIN 18032-2	-	-	99%
Impact Resistance	DIN 18032-2	-	-	15Nm / 18Nm / 20Nm
Remaining Indentation	DIN 18032-2	-	-	0.12mm / 0.17mm / 0.16m

TEMPOTILE™ Modular Flooring

- Full line of 12" x 12" multi-purpose, interlocking modular flooring
- Male-female snap connection system allows for simple installs, dismantles and transport
- Affordable, durable, and low-maintenance
- Available in 4 styles and a variety of colors

TempoTile™ is our line of multi-purpose modular flooring, available in several varieties that are suitable for endless applications, including game courts, tennis courts, aerobics, and multi-purpose areas. These 12" square interlocking plastic tiles connect in all directions to create a durable raised surface. TempoTile is extremely easy to install and dismantle, making it ideal for temporary applications such as tournaments, field days, and non-sporting events. Manufactured in a co-polymer polypropylene base for greater durability, these tiles are built to last.


- These lightweight economical tiles snap together with a unique clip and loop connection system that does not require tools or skilled labor.
- Add edging and corner pieces as required to finish your floor.
- Simple to install, clean, transport and store
- Each TempoTile sits on over 900 ribbed support pillars for kinetic impact, shock absorption, and weight distribution.
- Striping and lining are available for game courts as well as a rubber underlayment for sound dampening properties and improved ball bounce.

Available in 4 varieties:

- TempoTile Deluxe: 0.787" x 1' x 1' tile with real oak parquet top
- TempoTile Vinyl: 0.563" x 1' x 1' tile with vinyl laminate top
- TempoTile Smooth: 0.45" x 1' x 1' tile with smooth top
- TempoTile Tennis: 0.75" x 1' x 1' tile



COLORS

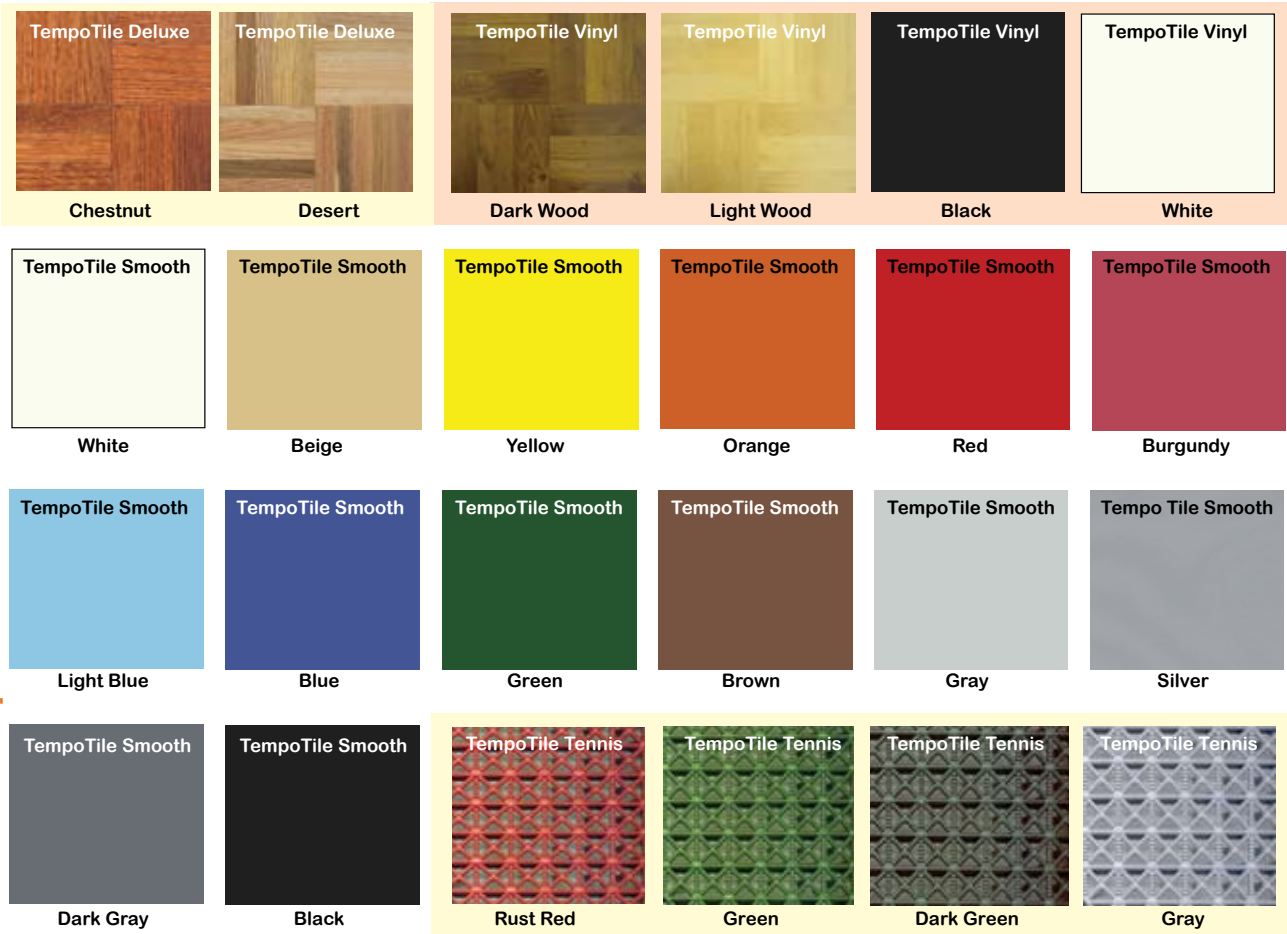

TECHNICAL SPECIFICATIONS

	TempoTile Deluxe	TempoTile Vinyl	TempoTile Smooth	TempoTile Tennis
Base Material	Top: real oak parquet Base: matching polypropylene co-polymer	Top: vinyl laminate Base: black polypropylene co-polymer	Polypropylene co-polymer, High-impact material	Polypropylene co-polymer, High-impact material
Use	Indoor gyms, fitness centers, common areas	Indoor gyms, common areas	Indoor/outdoor game courts multi-sport surfaces	Indoor/outdoor tennis and multi-sport surfaces
Dimensions	Tile: 1' x 1' x 0.787"H Preassembled panel: 3' x 3' x 0.563"H	Tile: 1.01' x 1.01' x 0.563"H Preassembled panel: 3' x 3' x 0.563"H	Tile: 1' x 1' x 0.45"H Preassembled panel: 3' x 3' x 0.45"H	Tile: 1' x 1' x 0.75"H Preassembled panel: 3' x 3' x 0.75"H
Module Weight	Tile: 1.91 lbs. / .867 kg Preassembled panel: 17.21 lbs. / 7.81 kg	Tile: 1.52 lbs. / .689 kg Preassembled panel: 13.68 lbs / 6.2 kg	Tile: .912 lbs. / .414 kg Preassembled panel: 8.2 lbs. / 3.72 kg	Tile: .683lbs. / .309 kg Preassembled panel: 6.15 lbs. / 2.79 kg
Fire Rating	UL94HB (Underwriter's Lab Yellow Card Number)	UL94HB (Underwriter's Lab Yellow Card Number)	UL94HB (Underwriter's Lab Yellow Card Number)	----
Colors	2 colors	4 colors	14 colors	4 colors
Connection System	7-point snap connection (per side); no tools	7-point snap connection (per side); no tools	7-point snap connection (per side); no tools	5-point snap connection (per side); no tools
Edging	Matching color; 1' sections	Black; 1.01' sections	Black; 1.01' sections	Matching color; 2" x 12"
Warranty	3-year warranty against manufacturer's defects	3-year warranty against manufacturer's defects	3-year warranty against manufacturer's defects	Optional 10-year warranty

SIGNADECK™ PREMIER Rubber Flooring

- Our most attractive multi-purpose flooring
- Made from high-quality EPDM and SBR
- Simple installation and maintenance
- Unique alternative to pad and pour systems for many applications
- Available in 4 styles and several colors

SignaDeck premier rubber flooring is our most durable and versatile modular sports flooring product. These ultra tough tiles are as attractive as they are strong, making them the perfect solution for weight rooms, cardiovascular rooms, aerobic rooms, common areas, swimming areas, locker rooms, rehabilitation centers, healthcare facilities, corridors, commercial buildings, and any high traffic areas. Add the optional 6.5mm rubber underlayment to the 3mm surface tile for extra shock and sound absorption.

- Available in 13 attractive colors with decorative flecks to complement any design style.
- SignaDeck is slip, spike, wear, chemical, and burn resistant. This means that just about any activity can be performed on this flooring without causing damage.
- SignaDeck is shock and sound absorbent.
- SignaDeck rubber floor tiles can either be glued to a prepared subfloor using a specially formulated adhesive for permanent applications or can be left to "float" on the existing surface. Installation is quick and easy, but our certified sports flooring experts are happy to help.
- Seamless appearance creates a uniform upscale look.
- Sustains its structure under rolling or static loads and handles the impact of weights and other equipment.


Available in 4 styles:

- SignaDeck tiles: 3mm x 19.7" x 19.7"
- SignaDeck Ultra tiles: 9.5mm (includes a 6.5mm rubber underlayment) x 19.7" x 19.7"
- SignaDeck Premium tiles: 3mm x 39.37" x 39.37"
- SignaDeck Premium Ultra Rubber tiles: 9.5mm (includes a 6.5mm rubber underlayment) x 39.37" x 39.37"

SignaDeck and SignaDeck Ultra are made from EPDM (Ethylene Propylene Diene Monomer) and SBR (Styrene Butadiene Rubber) and meet LEED certification for use of recycled products.

SignaDeck Premium and Premium Ultra are made from Dual Durometer vulcanized rubber.

SignaDeck and SignaDeck Premium. One-layer tiles are 3mm thick. Ideal for common areas, office and reception areas.

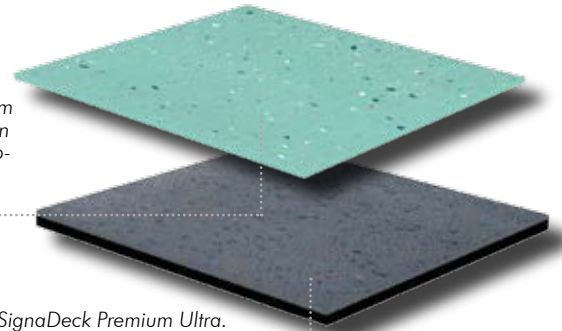

SignaDeck Ultra and SignaDeck Premium Ultra. Two-layer tiles are 9.5mm thick with rubber backing. Ideal for weight rooms and exercise rooms.





Ideal multi-purpose floor for nearly any area

SignaDeck (3mm) and SignaDeck Ultra (9.5mm) tile dimensions are 19.7" x 19.7"

SignaDeck Premium (3mm) and SignaDeck Premium Ultra (9.5mm) tile dimensions are 39.37" x 39.37"

Tiles are available in 2 thicknesses - 3mm and 9.5mm

Slip-resistant, spike-resistant, water resistant, burn resistant and chemical-resistant. Flame spread class 1 rating

Durable - resists wear and absorbs sound


Easy maintenance and installation

Made from EPDM (Ethylene Propylene Diene Monomer) and SBR (Styrene Butadiene Rubber) or Dual Durometer Vulcanized Rubber (SignaDeck Premium and Ultra Tile Premium)


Meets LEED certification




COLORS - 3mm SignaDeckTile

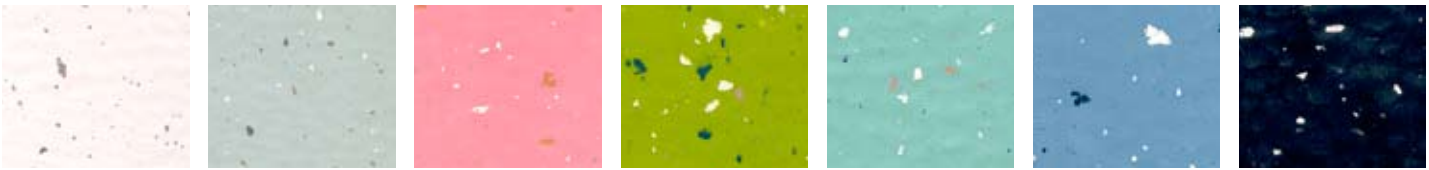

COLORS - 3mm Premium Tile & 9.5mm Premium Ultra Tile

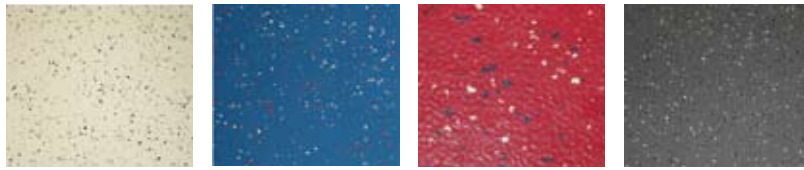

COLORS - 9.5mm Ultra Tile

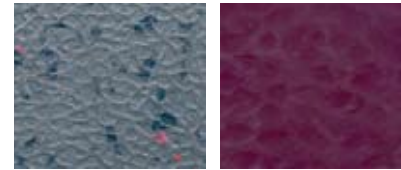

TECHNICAL SPECIFICATIONS

ITEM	SignaDeck / Ultra		SignaDeck Premium / Premium Ultra	
	STANDARDS	TEST RESULT	STANDARDS	TEST RESULTS
Hardness	ASTM D2240	Shore A 85 ± 5	ISO 7619 (3mm)	Shore A 85 ± 5
			ASTM D2240 (9.5 mm)	Shore A 81
Tensile Strength	ASTM D412	≥ 1020 psi	ASTM D412	868 psi
Tensile Elongation	ASTM D412	≥ 150%	ASTM D412	347%
Tear Strength	ASTM D624	≥ 125 lbs/in	ASTM D624	161 lbs/in
Abrasion Test	AKRON 1000g*15 angle	≤ 0.48g	ISO 4649	150mm ³
Water Absorption	ASTM D570	< 1%	ASTM D570	0.13%
Indentation	176°, 6 hrs	< 0.6%	EN 433	0.15 mm
Static Coefficient of Friction	ASTM D2047	0.85	-	-
Fire Behavior	ASTM E648	Class 1	DIN 4102	Class 1, B1
Density of Smoke	ASTM E662	Pass: < 450 value	ASTM E662	Pass: < 450 value
Electronic Resistance	ASTM D257	603 x 1011 Ohm/cm	EN1081	≤ 10 ⁹
Color Fastness to Light	CNS 8907	Class 4-5	EN 20105-B02	≥ 6



Signature Sports Flooring
50 East 42nd Street, 14th Floor
New York, NY 10017

www.signaturesportsflooring.com



SPECIALISTS IN SPORTS FLOORING
www.signaturesportsflooring.com

CORPORATE HEADQUARTERS
Signature Sports Flooring
50 East 42nd Street, 14th Floor
New York, NY 10017
TOLL FREE 800-705-1544
DIRECT 212-953-1116

MARYLAND OFFICE
Signature Sports Flooring
2662-2664 W. Patapsco Ave.
Baltimore, MD 21230
TOLL FREE 800-266-1475

CALIFORNIA OFFICE
Signature Sports Flooring
11323 Shoemaker Ave.
Santa Fe Springs, CA 90670
TOLL FREE 800-259-8480

